GV-FD320D 3MP H.264 Fixed IP Dome

- 1/2.5" progressive scan CMOS
- Stream 1 from H.264 and MJPEG;
  Stream 2 from H.264, MPEG4 and MJPEG
- Up to 20 fps at 2048 x 1536
- 3-axis mechanism (pan / tilt / roll)
- Varifocal megapixel lens
- Intelligent IR
- 2-way audio
- AAC and G.711 audio codec
- One sensor input and alarm output
- TV-out support
- Micro SD/SDHC Card Slot
- DC 12V / AC 24V / PoE
- Motion detection
- Tampering alarm
- Privacy mask
- Removable IR-cut filter for Day/Night function
- IP address filtering
- Supports iPhone, iPad, Android & 3GPP
- 28 languages on Web interface

*** No SD/SDHC card slot & local storage function for Argentina.**

Active Tampering Alarm

Tampered

Focus Change

Camera Shift

Hard-Ceiling Mount







In-Ceiling Mount

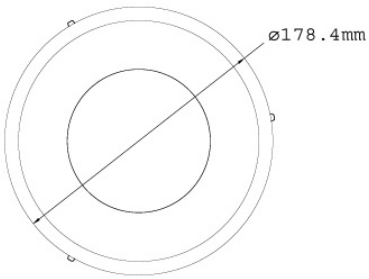

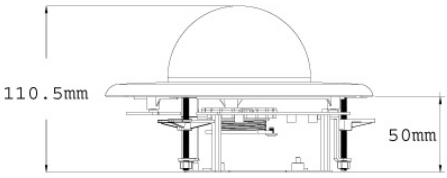



SPECIFICATIONS

Camera		
Image Sensor		1/2.5" progressive scan CMOS
Picture Elements		2048 (H) x 1536 (V)
Minimum Illumination	Color	1 Lux (1/30 sec), 0.5 Lux (1/5 sec)
	B/W IR ON	0 Lux
Shutter Speed		Automatic, Manual (1/5 ~ 1/8000 sec)
White Balance		Automatic, Manual (2800K ~ 8500K)
Lens		
Megapixel		Yes
Day/Night		Yes (with removable IR-cut filter)
Lens Type		Varifocal
Focal Length		2.7 ~ 9 mm
Maximum Aperture		F/1.3
Mount		Ø 14 mm
Image Format		1/3"
Angle of View	Diagonal	101° (W) ~ 32° (T)
	Horizontal	88° (W) ~ 27.9° (T)
	Vertical	49.7° (W) ~ 15.7° (T)
Operation	Focus	Manual (w / lock)
	Zoom	Manual (w / lock)
	Iris	DC drive
IR LED Quantity		15 IR LEDs
IR Distance		15 m / 50 ft (Max.)
Operation		
Video Compression		H.264, MPEG4, MJPEG
Video Streaming		Stream 1 from H.264 and MJPEG; Stream 2 from H.264, MPEG4 and MJPEG
Frame Rate		20 fps at 2048 x 1536 * The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes).
Image Setting		Brightness, Contrast, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, Backlight Compensation, D/N Sensitivity
Audio Compression		G.711, AAC (16 kHz / 16 bit) * AAC is only supported by GV-System V8.5 or later
Sensor Input		1 Input (Dry Contact)
Alarm Output		1 Output (200mA 5V DC)
Video Resolution		
Main Stream	4:3	2048 x 1536, 1600 x 1200, 1280 x 960, 640 x 480, 320 x 240
	16:9	1920 x 1080, 1280 x 720, 640 x 360, 448 x 252
	5:4	1280 x 1024, 640 x 512, 320 x 256
Sub Stream	4:3	640 x 480, 320 x 240
	16:9	640 x 360, 448 x 252
	5:4	640 x 512, 320 x 256
Network		
Interface		10/100 Ethernet
Ethernet Protocol		HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP)
Mechanical		
Lens Mounting		ø 14 mm
Camera Angle Adjustment	Pan	0° ~ 350°
	Tilt	10° ~ 90°
	Rotation	0° ~ 340°
Temperature Detector		Yes

Connectors	Power	2-pin terminal block, PoE
	Ethernet	Ethernet (10/100 Base-T), RJ-45
	Audio	1 In (microphone phone jack, 3.5 mm / 0.14 in) 1 Out (Stereo phone jack, 3.5 mm / 0.14 in)
	Digital I/O	3-pin terminal block, pitch 2.5 mm / 0.1 in
	Auto Iris	DC drive
	Local Storage	Micro SD/SDHC memory card slot (for Class 6 card or above)
	TV-Out	BNC connector (640 x 480)
General		
Environment Temperature		0 °C ~ 50 °C / 32 °F ~ 122 °F
Humidity		10% to 90% (no condensation)
Power Source		12V DC / 24V AC / PoE
Max. Power Consumption		12 W
Dimensions		ø 156 x 110 mm / 6.14 x 4.33 in
Weight		580 g / 1.28 lb
Regulatory		CE, FCC, C-Tick, RoHS compliant
Power over Ethernet		
PoE Standard		IEEE 802.3af Power over Ethernet / PSE
PoE Power Supply Type		End-Span
PoE Power Output		Per Port 48V DC, 350mA. Max. 15.4 watts
Web Interface		
Installation Management		Web-based configuration
Maintenance		Firmware upgrade through Web Browser or Utility
Access from Web Browser		Camera live view, video recording, change video quality, bandwidth control, image snapshot, digital I/O control, audio, Wide Angle Lens Dewarping, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay
Language		Czech / Danish / English / French / German / Hebrew / Hungarian / Italian / Japanese / Polish / Portuguese / Russian / Serbian / Simplified Chinese / Spanish / Traditional Chinese * Bulgarian, Dutch, Greek, Indonesian, Lithuanian, Norwegian, Persian, Romanian, Slovakian, Slovenian, Thai and Turkish are only supported in V1.07 or later.
Applications		
Network Storage		GV-NVR, GV-System, GV-Backup Center, GV-Recording Server
Mobile Phone support		GV-AView for Android Smartphone, GV-Eye HD for iPad, GV-Eye for iPhone and iPod Touch, GV-GView for Windows PDA, GV-MSView for Windows Smartphone, GV-SSView for Symbian Smartphone, 3G-enabled phone.
Live Viewing		IE , GV-MultiView
CMS Server support		GV-Control Center, GV-Center V2, GV-VSM

Note:

1. Do not use clothes or any ordinary material to clean the camera cover since they may result in scratches.
2. Specifications are subject to change without notice.